



## GENERAL FEATURES

- Rack size **60x50 cm**
- Gross weight: 80 Kg
- Washing cycles / racks/hour : 2'-3'-6'-∞/  
30-20-10
- Top and bottom wash/rinse arms
- Wash pump 680 W
- Boiler capacity 5 liters
- Tank capacity 22 liters
- Boiler heating element 4,5 kW
- Tank heating element 2,4 kW
- Water quantity per cycle: 2 liters
- Electronic control with color code switch
- Useful washing height: 400 mm
- Magnetic door microswitch
- Automatic water filling
- Electric rinse-aid dispenser
- Electric detergent dispenser
- Hot rinse
- Thermostop function
- Anti back-flow valve
- Automatic end-of-day self-cleaning water tank
- Soft-Start operation of wash pump
- Green function during pauses

## FILTRATION

- Plastic wash pump filter, easily removable
- S/s tank filters for pre-filtering of tank water

## BODY

- AISI 304 stainless steel Body
- Double skinned body
- Preformed rack guides
- Preformed wash tank
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304

## EQUIPMENT

- 1 s/s support for no.4 trays
- 1 rack for utensils 60x50 cm.
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

## OPTIONAL

- Drain pump
- Rinse booster pump
- Commutable voltage
- Boiler heating element 6 kW
- 60 Hz version

## ACCESSORIES FOR THE WATER TREATMENT

- Internal water softener ("S" version)

## ACCESSORIES

- Supporting s/s stand h. 420mm+adjustable feet
- Special racks

## INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

## MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided



## WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

## TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N / 220-240V3 / 220-240V**  
~ 50 Hz
- Total power : **5,18 kW**
- Amperage: **8 A / 13 A / 23 A**
- Power cord supply size : **5 x 2,5 / 3 x 4 mmq**

## AU 60.40E

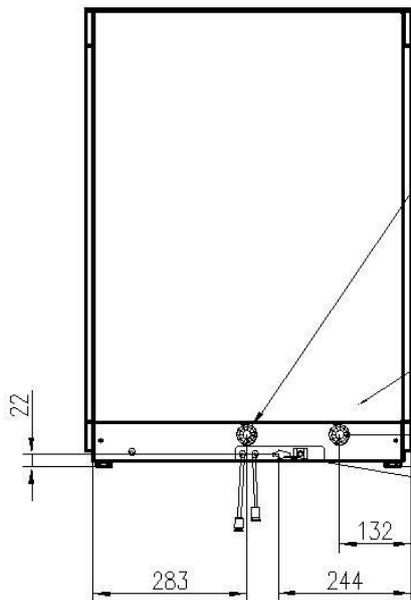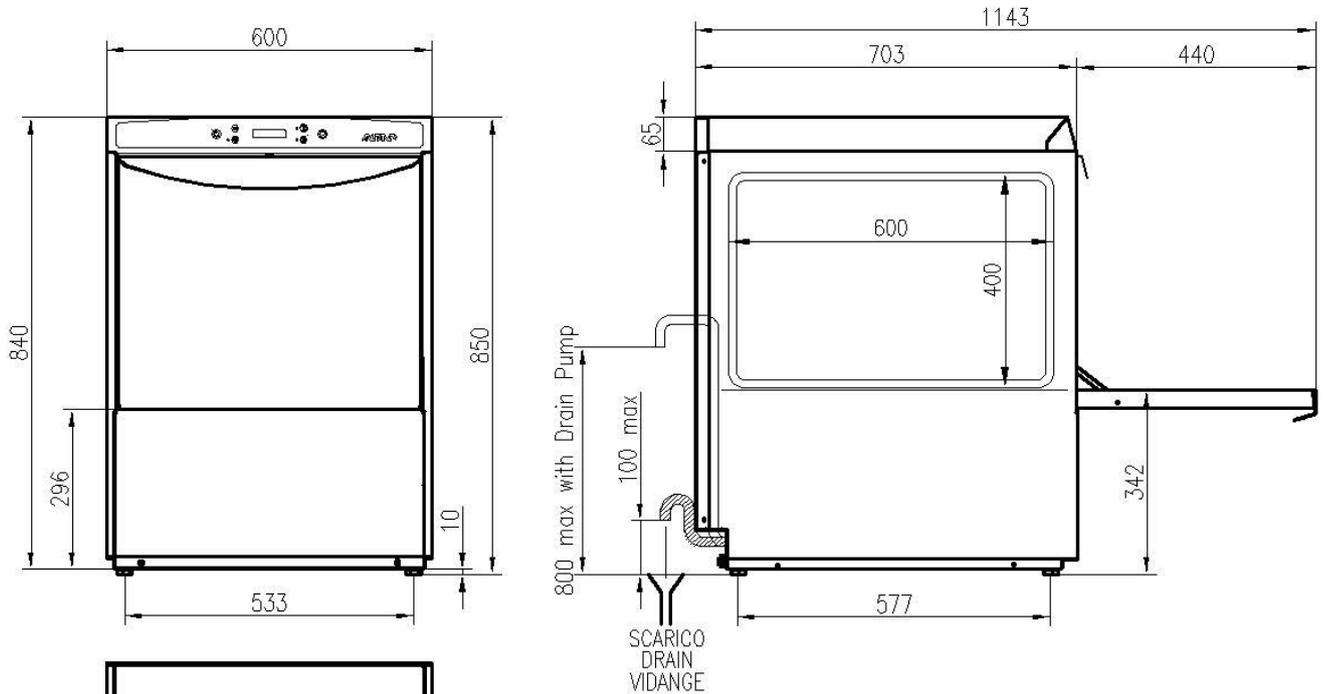

VISTA POSTERIORE  
REAR OF MACHINE  
VUE ARRIERE

USCITA TUBO DI SCARICO Ø INT. mm.23 L=mm.2500  
EXIT WATER OUTLET PIPE INT. Ø 23 mm. L=mm.2500.  
OUVERTURE DE PASSAGE TUYAU DE VIDANGE Ø INT. 23 mm. L=mm.2500.

CANNA DI CARICO CON ATTACCO G 3/4" L=mm. 2000.  
WATER INLET PIPE CONNECTION G 3/4" L=mm 2000.  
OUVERTURE DE PASSAGE TUYAU D'ALIMENTATION EAU AVEC  
CONNEXION G 3/4" L=mm 2000.

USCITA CAVO DI ALIMENTAZIONE  
EXIT POWER CORD SUPPLY  
OUVERTURE DE PASSAGE CABLE D'ALIMENTATION

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20°f-2.8÷11°d